



### PRODUCT DESCRIPTION


Precision regulated, very low noise, high performance high voltage power supplies are fully programmable (0 to 100%) and feature high voltage monitor readback, on-board precision reference, wide input voltage range and protection against arcs and short circuits all in a miniature, shielded case. Please refer to our CA series data sheet for standard temperature.

### PRODUCT SELECTION TABLE

| MODEL  | OUTPUT VOLTAGE<br>(POSITIVE OR NEGATIVE) | MAXIMUM OUTPUT CURRENT <sup>x1</sup> |
|--------|--|--------------------------------------|
| CA02-T | 0 to 200V                                | 0 to 5 mA                            |
| CA05-T | 0 to 500V                                | 0 to 2 mA                            |
| CA10-T | 0 to 1,000V                              | 0 to 1mA                             |
| CA12-T | 0 to 1,250V                              | 0 to 0.8 mA                          |
| CA20-T | 0 to 2,000V                              | 0 to 0.5 mA                          |

Complete List of Models on page 2

**Programming Voltage vs Output Voltage**

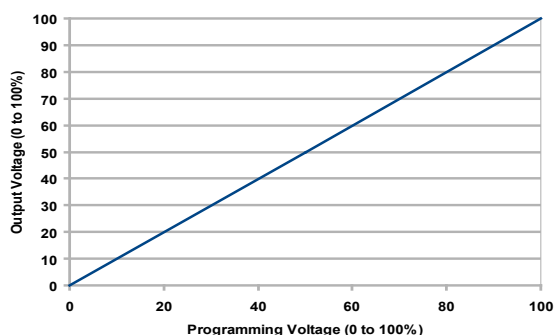

### FEATURES

- Very Low Ripple, as low as 5PPM!
- Precision Regulated
- Miniature Shielded Case, 1 cubic inch
- 0 to 100% Programmable output
- Voltage Monitor/ Readback
- High Stability, typically <25ppm/°C
- Wide Input Voltage Range
- Arc, Short Circuit Protected, Short Duration, Up To 1 Minute
- Very Low EMI/RFI
- Precision On board Reference
- External Voltage or Potentiometer Programming
- Accessible Calibration Adjustment
- Sealed To Withstand Immersion Cleaning Processes
- Designed to meet the requirements of UL1950
- Proven Reliability, MTBF: >2.10 million hrs per Bellcore TR-332
- UL94V-0 Listed Proprietary Encapsulant

### APPLICATIONS

Photomultiplier Tubes  
Avalanche Photodiodes  
Solid State Detectors  
Electrophoresis  
EO Lenses  
Piezo Devices  
Capacitor Charging

### OPTIONS

- Available with a 5VDC input voltage
- RoHS versions available (R suffix)



## ELECTRICAL SPECIFICATIONS\*2 CA02 - CA20 (200V to 2000V)

| OUTPUT<br>VOLTAGE   | MODEL    | MAXIMUM<br>OUTPUT<br>CURRENT*1 | RIPPLE<br>P-P<br>FULL-LOAD*3 | REGULATION          |                         | FREQUENCY*3   |
|---------------------|----------|--------------------------------|------------------------------|---------------------|-------------------------|---------------|
|                     |          |                                |                              | LOAD<br>0 TO 100%*3 | LINE<br>11.5 TO 15.5V*3 |               |
| 12 VDC INPUT MODELS |          |                                |                              |                     |                         |               |
| 0 to +200V          | CA02P-T  | 0 to 5 mA                      | <0.01 %                      | <0.05 %             | <0.01 %                 | 80 - 180 kHz  |
| 0 to -200V          | CA02N-T  | 0 to 5 mA                      | <0.01 %                      | <0.05%              | <0.01%                  | 80 - 230 kHz  |
| 0 to +500V          | CA05P-T  | 0 to 2 mA                      | <0.01 %                      | <0.01 %             | <0.01%                  | 200 - 400 kHz |
| 0 to -500V          | CA05N-T  | 0 to 2 mA                      | <0.01 %                      | <0.01 %             | <0.01 %                 | 100 - 250 kHz |
| 0 to +1,000V        | CA10P-T  | 0 to 1 mA                      | <0.001 %                     | <0.005 %            | <0.001 %                | 80 - 250 kHz  |
| 0 to -1,000V        | CA10N-T  | 0 to 1mA                       | <0.001 %                     | <0.005 %            | <0.001 %                | 100 - 250 kHz |
| 0 to +1,250V        | CA12P-T  | 0 to 0.8 mA                    | <0.0005 %                    | <0.005 %            | <0.001 %                | 80 - 250 kHz  |
| 0 to -1,250V        | CA12N-T  | 0 to 0.8 mA                    | <0.0005 %                    | <0.005 %            | <0.001 %                | 80 - 250 kHz  |
| 0 to +2,000V        | CA20P-T  | 0 to 0.5 mA                    | <0.001 %                     | <0.01 %             | <0.01 %                 | 80 - 250 kHz  |
| 0 to -2,000V        | CA20N-T  | 0 to 0.5 mA                    | <0.001 %                     | <0.01 %             | <0.01 %                 | 100 - 250 kHz |
| 5 VDC INPUT MODELS  |          |                                |                              |                     |                         |               |
| 0 to +200V          | CA02P-5T | 0 to 5 mA                      | <0.01 %                      | <0.01 %             | <0.01 %                 | 100 - 250 kHz |
| 0 to -200V          | CA02N-5T | 0 to 5 mA                      | <0.01 %                      | <0.005 %            | <0.003 %                | 100 - 250 kHz |
| 0 to +500V          | CA05P-5T | 0 to 2 mA                      | <0.005 %                     | <0.003 %            | <0.002 %                | 100 - 250 kHz |
| 0 to -500V          | CA05N-5T | 0 to 2 mA                      | <0.005 %                     | <0.005 %            | <0.002 %                | 87 - 350 kHz  |
| 0 to +1,000V        | CA10P-5T | 0 to 1 mA                      | <0.001 %                     | <0.005 %            | <0.001 %                | 100 - 250 kHz |
| 0 to -1,000V        | CA10N-5T | 0 to 1 mA                      | <0.001 %                     | <0.005 %            | <0.001 %                | 100 - 250 kHz |
| 0 to +1,250V        | CA12P-5T | 0 to 0.8 mA                    | <0.001 %                     | <0.005 %            | <0.001 %                | 150 - 300 kHz |
| 0 to -1,250V        | CA12N-5T | 0 to 0.8 mA                    | <0.001 %                     | <0.005 %            | <0.001 %                | 150 - 300 kHz |
| 0 to +2,000V        | CA20P-5T | 0 to 0.5 mA                    | <0.001 %                     | <0.005 %            | <0.003 %                | 45 - 250 kHz  |
| 0 to -2,000V        | CA20N-5T | 0 to 0.5 mA                    | <0.001 %                     | <0.001 %            | <0.001 %                | 100 - 250 kHz |

|        | INPUT CURRENT |           |         |           |
|--------|---------------|-----------|---------|-----------|
|        | CA02-CA12     |           | CA20    |           |
| VIN    | NO-LOAD       | FULL-LOAD | NO-LOAD | FULL-LOAD |
| 5 VDC  | < 65mA        | <420mA    | <155 mA | <550 mA   |
| 12 VDC | <80 mA        | <220 mA   | <100 mA | <220 mA   |

## ELECTRICAL SPECIFICATIONS\*2 CA02 - CA20 (200V to 2000V)

| PARAMETER                        | VALUE  |
|----------------------------------|--|
| INPUT VOLTAGE                    | INPUT MODELS: +11.5 TO +15.5v (STANDARD)       |
|                                  | 5V INPUT MODELS: +4.75 TO +5.25V               |
| STANDBY POWER                    | <25mW*3  |
| INPUT CAPACITANCE                | 440uF  |
| PROGRAMMING VOLTAGE              | 12V INPUT MODELS: 0 TO +5V, <150uA             |
|                                  | 5V INPUT MODELS: 0 TO +2.048V <150uA           |
| SET POINT ACCURACY               | 1%   |
| GAIN ADJUST                      | 1%   |
| LINEARITY                        | <0.5% (15% TO 100% VOUT)                       |
| STABILITY                        | <0.005%/HR*3                                   |
| VOLTAGE MONITOR*5                | 12V INPUT MODELS: 0 TO +5V = 0 TO 100% VOUT    |
|                                  | 5V INPUT MODELS: 0 TO +2.048V = 0 TO 100% VOUT |
| REFERENCE OUTPUT                 | 12V INPUT MODELS: +5V +/- 1% , UP TO 1 mA      |
|                                  | 5V INPUT MODELS: +2.048V +/- 1% , UP TO 1 mA   |
| TEMPCO                           | <25PPM/°C*3                                    |
| THERMAL SHOCK LIMIT              | 1°C/10 SEC.                                    |
| EXTENDED TEMPERATURE RANGES (-T) | OPERATING: -55° TO +70°C*6 (CASE)              |
|                                  | STORAGE: -55° TO +95°C                         |

## APPLICATION NOTES

**Sequencing**

As is the case for all active electronics, the user should apply power prior to control inputs. For the CA-T Series, it is recommended to wait at least 100msec after input power is applied before sending a voltage programming command.

**Dynamic Response**

In cases where the output voltage rises above the voltage programming command then settles. To mitigate this effect, ramp the voltage programming input at a slower rate until satisfactory results are achieved.

## DETAILED PRODUCT DESCRIPTION


The CA-T Series of high performance, precision regulated, high voltage power supplies offers improved performance and added features. Improvements in stability and ripple, along with an on board precision reference, a voltage monitor and increased protection, enable these modules to replace much larger, more expensive power supplies in many applications. Each model is programmed from 0 to 100% of rated output via a DAC compatible high impedance programming input. A voltage monitor is provided and is internally buffered to provide a low impedance (up to 1 mA) signal to external circuitry. The precision, on board reference can be used in conjunction with an external potentiometer or voltage divider to program the high voltage output. Each unit has an accessible potentiometer allowing for individual calibration after installation. A quasi-sinewave oscillator, internal transformer shielding, and an isolated steel case reduce EMI/RFI radiation to extremely low

levels. Suitable for photomultiplier tubes, avalanche photodiodes, precision EO lenses, piezo devices and other applications requiring precision, low noise, high voltage in a miniature, pc or chassis mount, cost effective package. A proprietary encapsulation process and custom 94V-0 listed, high performance formula are used to achieve excellent high voltage and thermal properties.

Also available with the CA-T Series are the CM Series adapter kits. For more details, refer to pages 7 and 8.


Small quantities available from stock from our factory or our stocking distributor in Switzerland, Condatas AG. For large quantity requests please consult our factory or our stocking distributor in Switzerland, Condatas AG.

## MECHANICAL SPECIFICATIONS

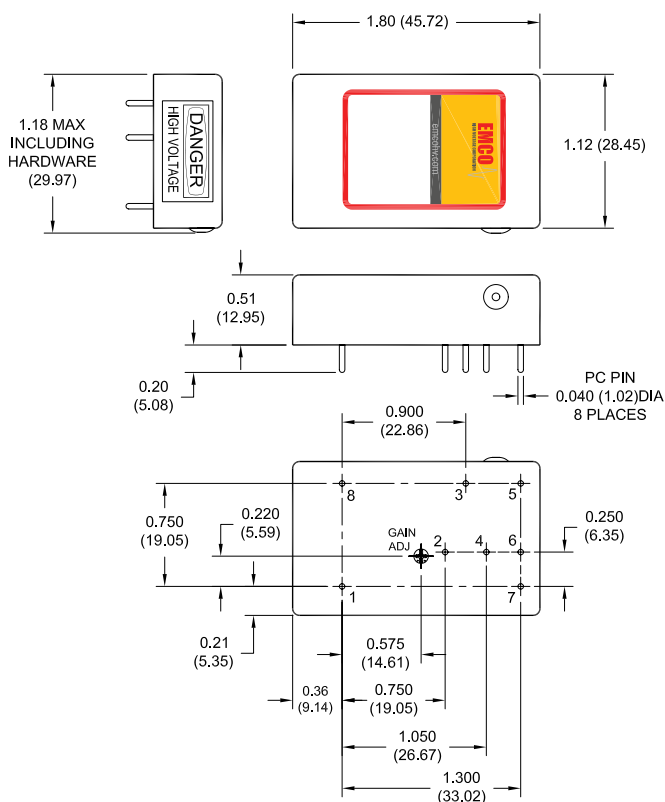

BOTTOM VIEW

## PCB LAYOUT COMPONENT SIDE

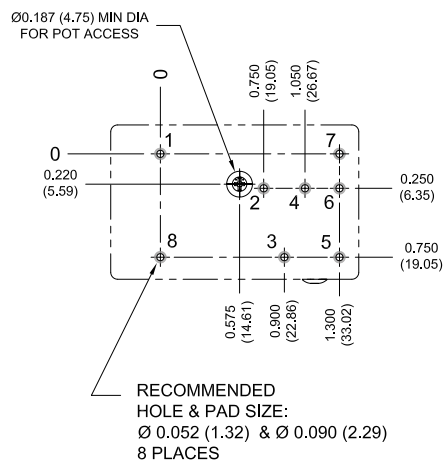


SEALED TO WITHSTAND IMMERSION CLEANING PROCESSES

DIMENSIONS ARE IN INCHES (METRIC EQUIVALENTS ARE IN PARENTHESIS)  
 DIMENSIONAL TOLERANCES: .XX = ± 0.02 (0.51), .XXX = ± 0.005 (0.127)

| PARAMETER     | VALUE   |
|---------------|---|
| WEIGHT        | 1.4 OZ. (39.6 GRAMS)                          |
| VOLUME        | 1.03 CUBIC INCHES (16.84cm <sup>3</sup> )     |
| DIMENSIONS    | 1.80L (45.72) x 1.12W (28.45) x 0.51H (12.95) |
| CASE MATERIAL | ZINC PLATED STEEL                             |

| PIN # | FUNCTION   |
|-------|--|
| 1     | OUTPUT VOLTAGE   |
| 2     | PROGRAMMING: 0 to +5V<br>5V Input models: 0 to +2.048V     |
| 3     | GROUND <sup>*1,2</sup>                                     |
| 4     | VOLTAGE REFERENCE: +5V<br>5V Input models: +2.048V         |
| 5     | CASE GROUND <sup>*1,2</sup>                                |
| 6     | INPUT: +11.5V to 15.5V<br>5V Input models: +4.75 to +5.25V |
| 7     | VOLTAGE MONITOR: 0 to +5V<br>5V Input models: 0 to +2.048V |
| 8     | OUTPUT RETURN <sup>*1,2</sup>                              |

BLOCK DIAGRAM

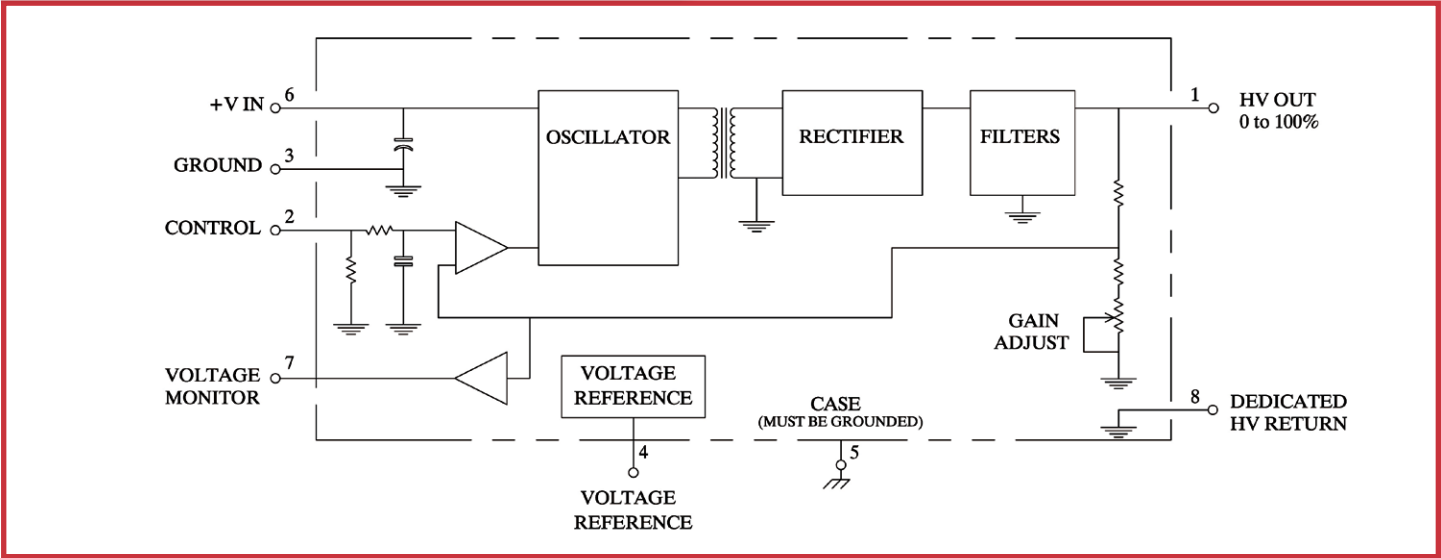

OPTIONS

| OPTION              | ORDER CODE        |       |
|---------------------|-------------------|-------|
| POLARITY DESIGNATOR | POSITIVE OUTPUT   | p     |
|                     | NEGATIVE OUTPUT   | N     |
| INPUT VOLTAGE       | 5 VDC             | 5     |
|                     | 12 VDC (STANDARD) | BLANK |
| RoHS                | VERSION           | R     |

HOW TO ORDER

**PART NUMBER SELECTOR:**

Model Number:

**CA 10 N - 5 T R**

**CA** - Model  
**10** - Output Voltage (See table)  
**N** - Polarity Designator

**R** - RoHS (Optional)  
**T** - Extended Operating Temperature  
**5** - Input Voltage

EXAMPLE: **CA10N-5TR** (**CA** - Model, **10** - Output Voltage, **N** - Negative, **5** - Input Voltage, **T** - Extended Operating Temperature, **R** - RoHS (Optional))

\* Notes:

1. Maximum rated output current is typically available from 100% max output voltage to 50% max output voltage, and is derated below 50% max output voltage.

2. Specifications after 1 hour warm-up, full load, at 25°C unless other wise indicated.

3. Typical Performance



4. All grounds internally connected, except case. There should not be more than 50 volts potential between the case ground (pin 5) and the circuit ground (pins 3 and 8). Isolated case assists low noise design efforts. Case pin must be connected to ground for proper operation.

5. On negative output models, voltage monitor output is a buffered representation of the programming voltage.

6. Proper thermal management techniques are required to maintain safe case temperature at maximum power output.

EMCO reserves the right to make changes on products and literature, including specifications, without notice. EMCO standard product models are not recommended for "copy-exact" applications or any other application restricting product changes. "Copy-exact" options are available. Please contact an EMCO sales representative for more details.

## CM1 (MHV): ALL CA MODELS

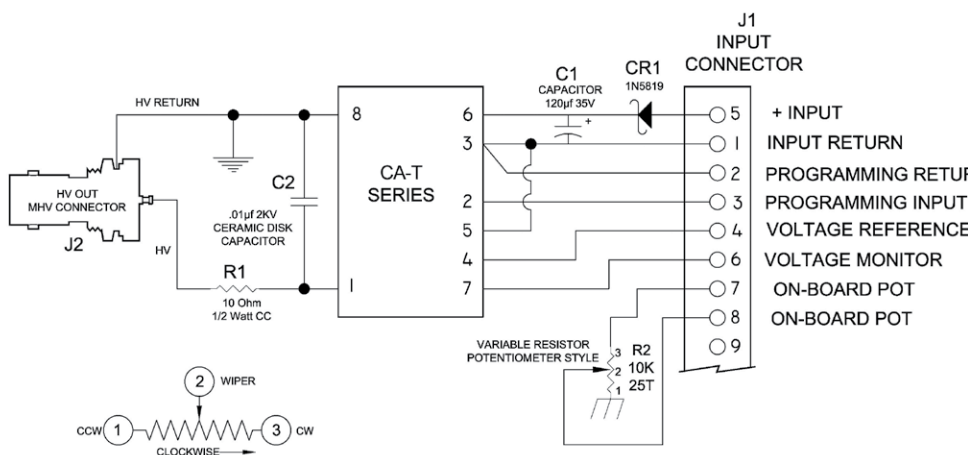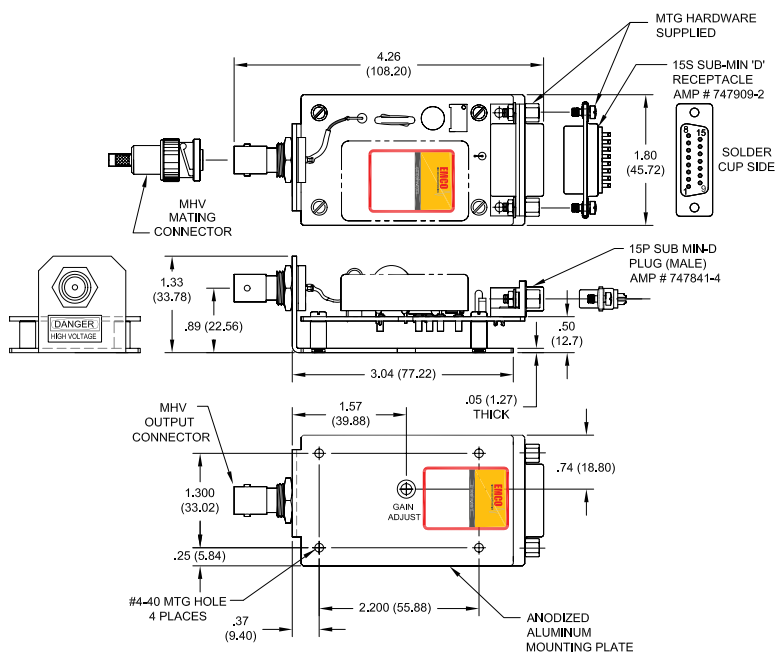

## PRODUCT DESCRIPTION

These adapters provide convenient proto-typing and evaluation during system development and integration, and allow these modules to be mounted to a chassis instead of designed in to a pc board. Extra filtering on the input and output improves performance. A schottky diode on the input provides reverse polarity protection. Input connector is via a 15P SUB MIN-D plug (mate supplied) and output is via an MHV style coaxial connector (mate supplied).



### ORDERING INFORMATION:

Please note when ordering a CM1 the CA-T Series is not included and must be ordered separately.

## PROGRAMMING OPTIONS / INSTRUCTIONS

1. Onboard Potentiometer: connect pins 7 to 4 and 8 to 3, turn potentiometer to adjust high voltage.
2. Remote Potentiometer: connect wiper arm to pin 3, other sides to pins 4 and 2.
3. Remote Analog Signal: apply programming voltage to pin 3, return to pin 2.

## CM2 (SHV): ALL CA MODELS

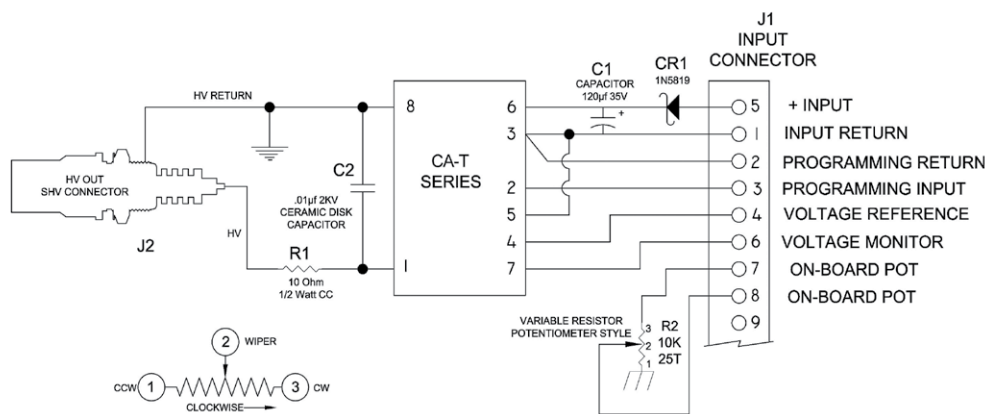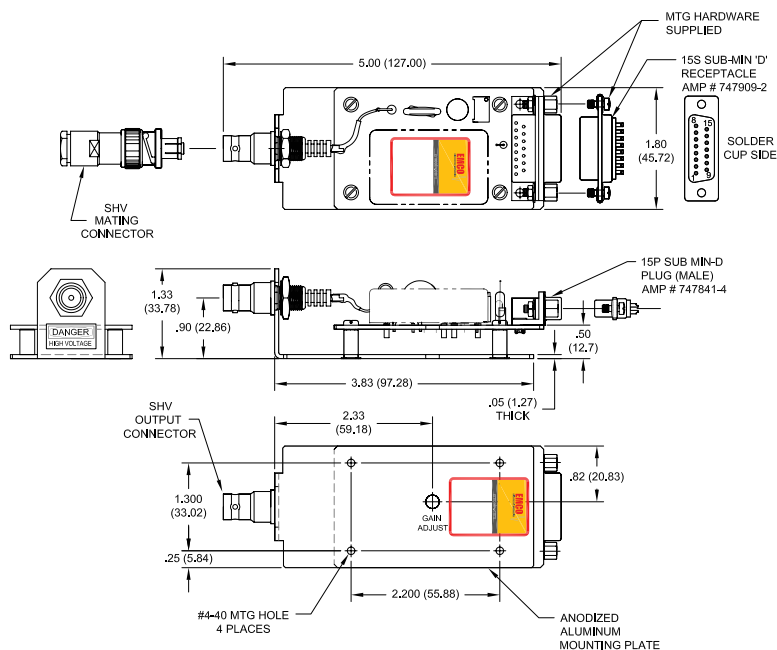

## PRODUCT DESCRIPTION

These adapters provide convenient proto-typing and evaluation during system development and integration, and allow these modules to be mounted to a chassis instead of designed in to a pc board.

Extra filtering on the input and output improves performance. A schottky diode on the input provides reverse polarity protection. Input connector is via a 15P SUB MIN-D plug (mate supplied) and output is via an SHV style coaxial connector (mate supplied).

### ORDERING INFORMATION:

Please note when ordering a CM2 the CA-T Series is not included and must be ordered separately.

## PROGRAMMING OPTIONS / INSTRUCTIONS

1. Onboard Potentiometer: connect pins 7 to 4 and 8 to 3, turn potentiometer to adjust high voltage.
2. Remote Potentiometer: connect wiper arm to pin 3, other sides to pins 4 and 2.
3. Remote Analog Signal: apply programming voltage to pin 3, return to pin 2.