
The use of the electric field of the microbunch for the beam energy measurement.


B.Zh. Zalikhanov

Joint Institute for Nuclear Researches

1. Introduction

In the ILC project [1] the several methods or the absolute calibration of the energy of the electron-positron beams are considered, some of them are essentially new. The application of the Compton backscattering of the laser photons on the electrons and the resonance absorption of laser light within a magnetic field are studied. The possibility of the precision measurement of the angle characteristics of the synchrotron radiation from the ILC magnetic spectrometer is investigated also.

Below one more new technique of the beam energy measurement through the electric field value from the microbunch electrons is proposed. It can be easy realised with the high sensibility the variation of the beam energy.

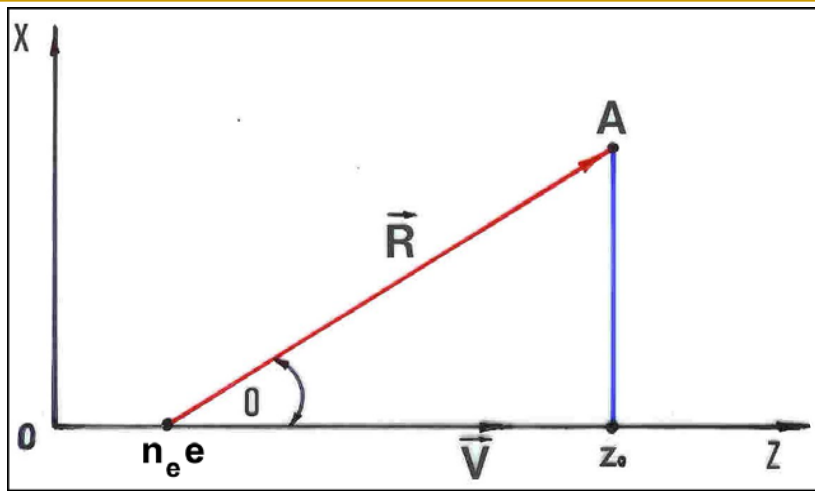

The electric field of the uniform charge is determined by the expression [2]

Fig.1

$$E = \frac{q}{4\pi\epsilon_0 R^2} \cdot \frac{1 - \beta^2}{[1 - \beta^2 \sin^2 \theta]^{3/2}} \quad (1)$$

where θ is the angle between the movement direction and the radius-vector R (fig.1); $\beta = v/c$.

The value of the field is minimal along the movement direction ($\theta = 0, \pi$) and is equal to

$$E_{//} = \frac{q}{4\pi\epsilon_0 R^2} \cdot (1 - \beta^2) = \frac{q}{4\pi\epsilon_0 R^2} \cdot \frac{1}{\gamma^2} \quad (2)$$

The electric field has maximum value in the direction perpendicular to the velocity ($\theta = \pi/2$)

$$\mathbf{E}_{\perp} = \frac{q}{4\pi\epsilon_0 R^2} \cdot \frac{1}{\sqrt{1-\beta^2}} = \frac{q}{4\pi\epsilon_0 R^2} \cdot \gamma \quad (3)$$

From the equations (2) and (3) one can see, that with the increase of the charge velocity v the component \mathbf{E}_{\parallel} decreases, but the value \mathbf{E}_{\perp} increases.

From the relation of the equations (2) to (3) we get

$$\frac{\mathbf{E}_{\perp}}{\mathbf{E}_{\parallel}} = \gamma^3 \quad (4)$$

3. The parameters of the microbunch

The number of the electrons in the microbunch is $n_e = 2 \cdot 10^{10}$. The length of the microbunch is $t = 10^{-12}$ sec. The geometrical sizes of the microbunch are $\sigma_x = 2 \mu\text{m}$, $\sigma_y = 20 \mu\text{m}$, $\sigma_z = 300 \mu\text{m}$. The electron energy is 250 GeV. The relativistic factor for such electrons is $\gamma = 4.892 \cdot 10^5$. The space charge density in the microbunch is $\rho = 0.26 \text{ C/cm}^3$.

Using the given parameters and the equation (1) let determine the position of the charge $q = n_e \cdot e$ relative to a point z_0 when the field in the point A is equal to zero. The given requirement is satisfied if the charge is in the range $z_0 \pm 1.5 \mu\text{m}$. If we take the effective field as $E \geq 10^2 \text{ V/cm}$, then this condition fulfilment at the position of the charge in the pointes $z_0 \pm 0.0001 \text{ cm}$.

Hence if the centre of the bunch with the volume $12 \cdot 10^{-9} \text{ cm}^3$ is in the point z_0 , then effective electric field in the point A will be produced by the electrons in the layer $z_0 \pm 0.0001 \text{ cm}$ thick.

If the electrons within the microbunch were described by the Gauss distribution, then the layer $z \leq 1 \mu\text{m}$ thick contains the number of electrons $n_1 \approx 2 \cdot 10^8$. At the position of this layer near in the neighbourhood point z_0 the components of the field have the next values:

$$E_{\perp} = \frac{n_1 e}{4 \pi \epsilon_0 a^2} \cdot \gamma = 1.4 \cdot 10^7 \text{ V / cm} \quad (5)$$

$$E_{\parallel} = \frac{n_e e}{4 \pi \epsilon_0 a^2} \cdot \frac{1}{\gamma^2} = 1.2 \cdot 10^{-10} \text{ V / cm} \quad (6)$$

Let the electron energy have decreased from 250 GeV to 230 GeV. In this case $\gamma = 4.5 \cdot 10^5$ and the value of the field strength along the movement direction will be equal to $E_{//} = 1.4 \cdot 10^{-10}$ V/cm. Comparing the field values for $E_{//}$ it is possible without a risk to take it equal to $1.3 \cdot 10^{-10}$ V/cm and to write the equation (4) in the form:

$$E = 1.3 \cdot 10^{-10} \cdot \gamma^3 \quad (7)$$

Differentiating the equation (7) we get

$$dE = 1.3 \cdot 10^{-10} \cdot 3\gamma^2 d\gamma \quad (8)$$

From here we have the connection between the measurement accuracy of the bunch electric field and the required accuracy of the determination of γ

$$\frac{1}{3} \frac{dE}{E} = \frac{d\gamma}{\gamma} \quad (9)$$

Because $d\gamma/\gamma=10^{(-5)}$, then according (9), the value of the microbunch field can be measured with the accuracy in 3 times less.

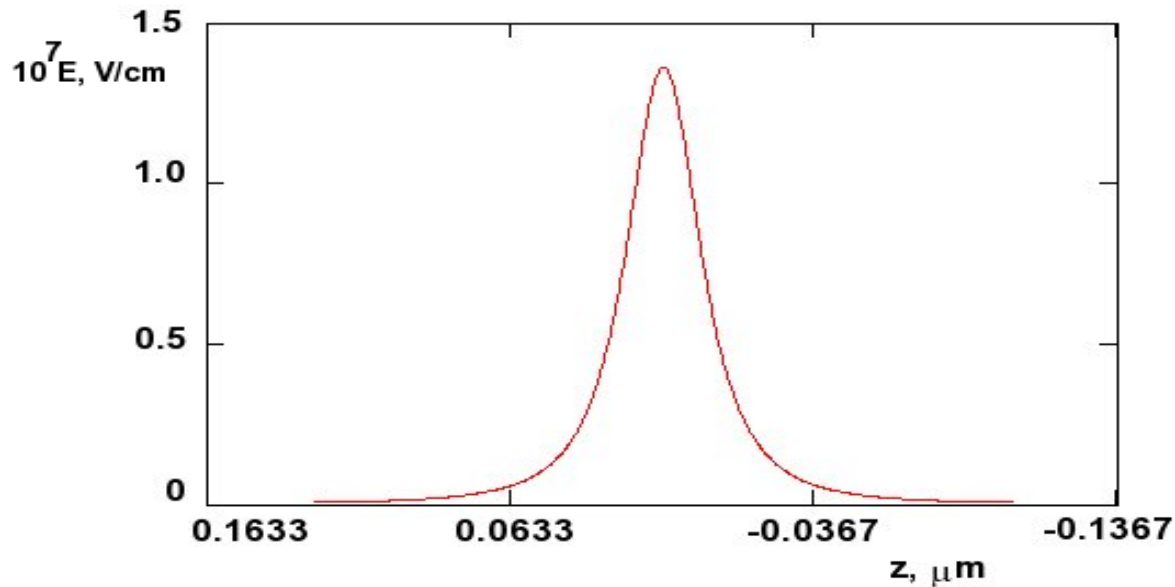


Fig.2. The electrical field of the electron layer of the moving microbunch.

$$\gamma = 4.892 \cdot 10^5,$$

$$N_e = 2 \cdot 10^8.$$

A distribution of an electrical field in the neighbourhood of z_0 point when the numbers of the electrons in the layer are taken equal to $2 \cdot 10^8$ and $\gamma = 4.892 \cdot 10^5$ is shown in fig.2.

The coordinates [0.0633; 0.0367] on the z-axis correspond to the field equals $5 \cdot 10^5$ V/cm. It will be seen from the distribution that the field of the electrons is localized within the range of the width 0.1 μm .

If γ is equal to $4.89237 \cdot 10^5$, then the energy of the electrons is equal to $\epsilon_1 = 250.000107 \cdot 10^9$ eV and when n_e is equal to $2 \cdot 10^8$ then the electrical field is equal to $E_1 = 1.1124525 \cdot 10^7$ V/cm.

When γ changes to quantity of $4.892382 \cdot 10^5$ we obtain for ϵ_2 and E_2 the next quantities:

$250.000720 \cdot 10^9$ eV and $1.1124866 \cdot 10^7$ V/cm.

It follows from these quantities that

$$\frac{\Delta\gamma}{\gamma} = 1.02 \cdot 10^{-5}, \quad \frac{\Delta E}{E} = 3 \cdot 10^{-5}$$

and the relationship (9) is carried out.

It should be noted the proposal method can be useful to determine the space position of the microbunch.

The dependence of the electrical field from the numbers of the electrons in the neighbourhood point z_0 in shown in Fig.3 and Fig.4.

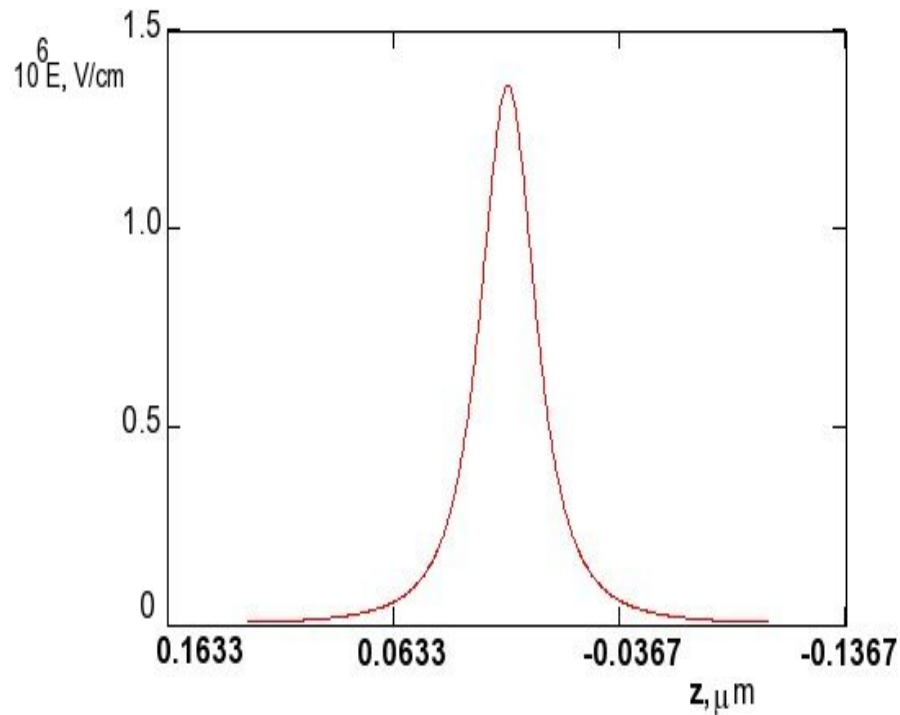


Fig.3. $\gamma=4.892 \cdot 10^5$, $n_e=2 \cdot 10^7$.

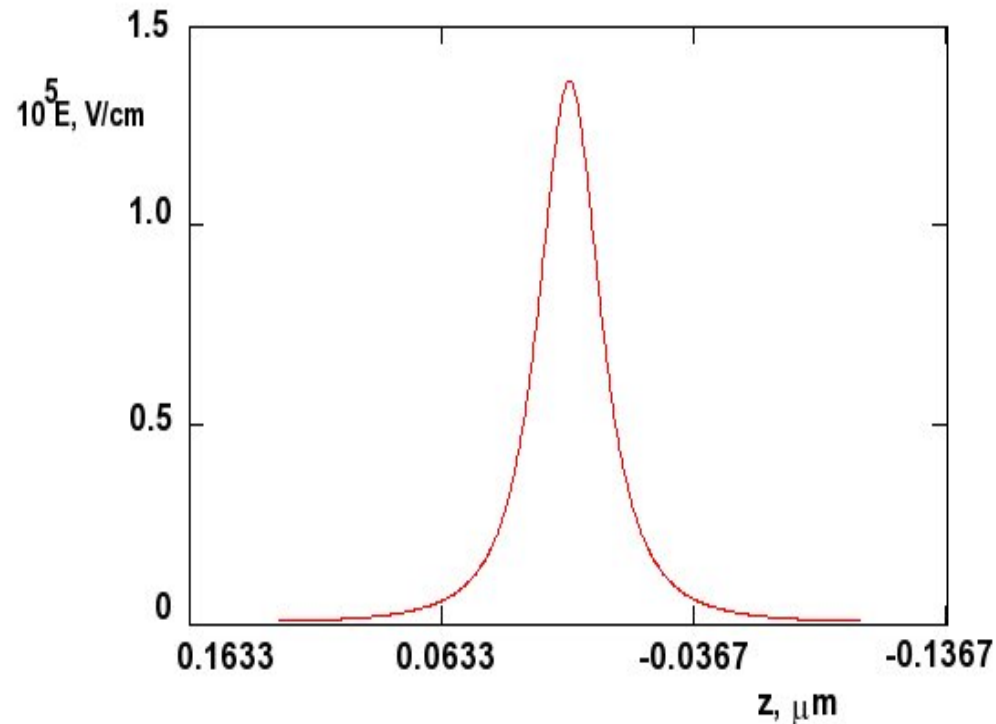


Fig.4. $\gamma=4.892 \cdot 10^5$, $n_e=2 \cdot 10^6$.

4. The measurement of the electric field of the microbunch

5. The variant of the detector.

(4 and 5 will be ready later)

6. References

- [1] The Beam Energy Spectrometer at the International Linear Collider, DESY Report, LC-DET-2004-031
 - [2] E.M. Purcell, Electricity and magnetism (Berkeley physics course, Vol.2)
-