

	IceCube upgrade	Revision: 1.5
	ICM Datasheet	Date: 2024-04-12
		Page: 10/11

9 ICM_x Test Points

9.1 Communcation, unfiltered Wire Pair and filtered ADC Input signal

Best, use a differential probe. Or two single ended probes + GND connection in differential math-mode.

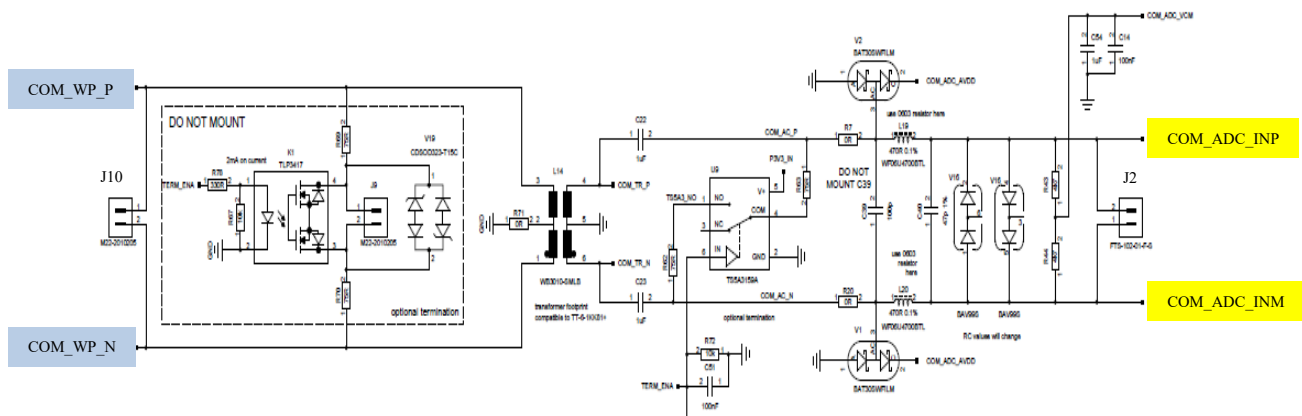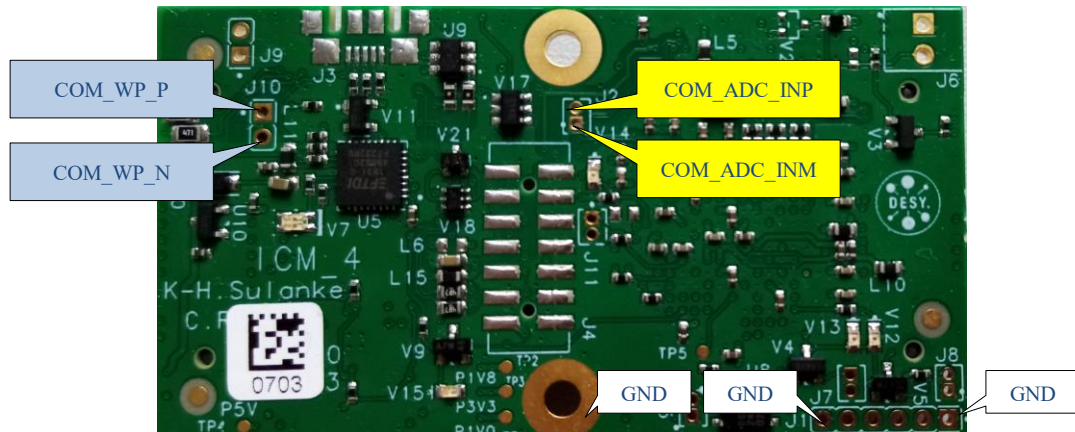

E.g., the half duplex comms. signal, measured at J2 at an mDOM-ICM, using a 1.5m 100ohm twisted pair cable and a diff. probe (Tektronix P6247).

