

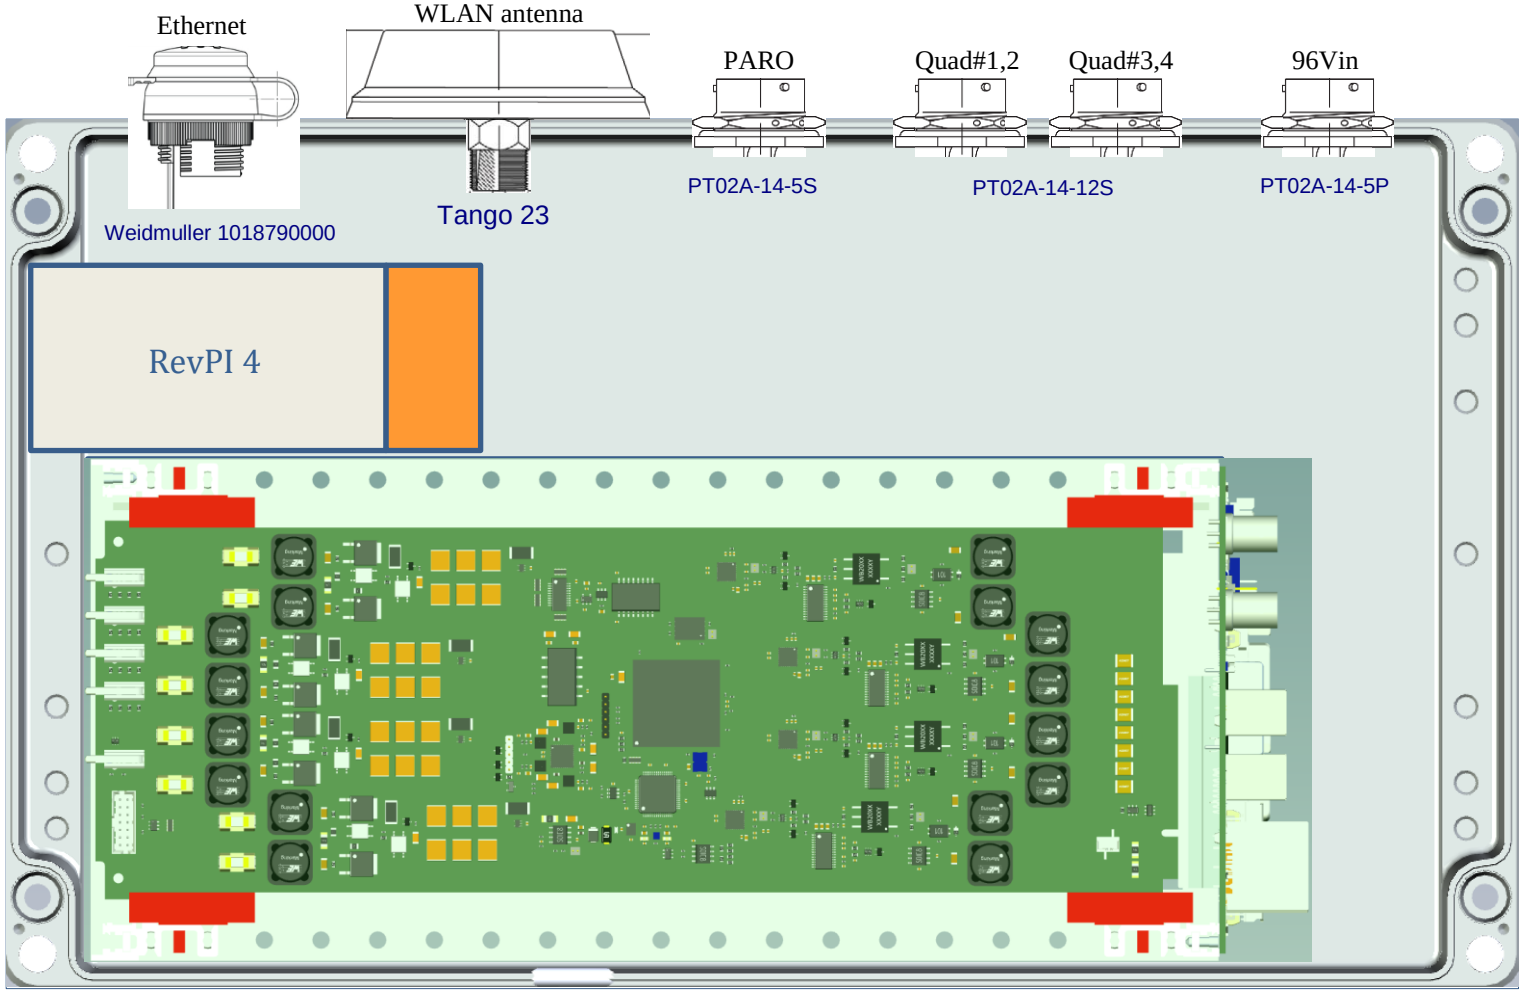


SpoolHub, Top View, scale 1:2, version #2, 2x2 quad conns. vertically aligned

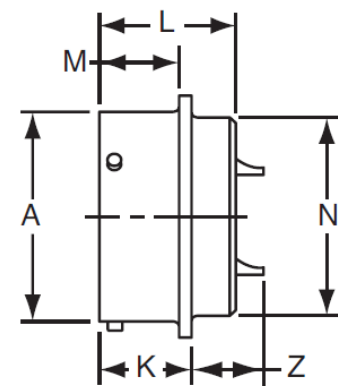

MIL-Spec Connectors, 14", Box Mounting

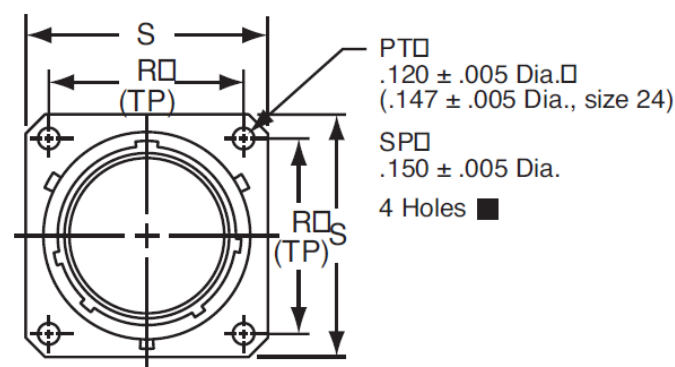


- PT02A-XX-XXX
- SP02A-XX-XXX
- PT02C-XX-XXX
- SP02C-XX-XXX
- PT02E-XX-XXX
- SP02E-XX-XXX
- MS3112E-XX-XXX
- PT02P-XX-XXX
- SP02P-XX-XXX
- MS3112P-XX-XXX

Shell Size	Receptacle Front View				Receptacle Side View								
	R (TP)		S		A +.001 -.005	K +.020 -.010		L Max.	M +.010 -.000		N Dia. Max.	Z Max.	
	PT	SP	PT	SP		PT	SP		PT	SP		PT	SP
	14	.906	1.031	1.125	1.344	.875	.493	.524	.825	.431	.462	.823	.465
mm	23,01	26,19	28,58	34,14	22,26	12,52	13,31	20,96	10,95	11,74	20,91	11,82	11,13

Antenna Tango 23

Mechanical Specifications

Dimensions:	23 mm height x 80 mm diameter
Weight:	80 g
Connector:	SMA Male with Reverse Polarity
Cable:	Low Loss CFL100
Mounting method:	M17 Screw Mount
Mounting Screw Length:	22 mm
Max Panel Thickness:	13 mm
Radome materials:	Nylon PA6

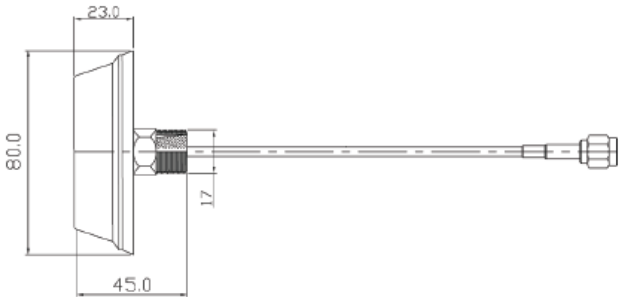

Ethernet Connector, Weidmuller 1018790000



Abmessungen und Gewichte	
Tiefe	42,9 mm
Tiefe (inch)	1,689 inch
Höhe	44 mm
Höhe (inch)	1,732 inch
Breite	29,5 mm
Breite (inch)	1,161 inch
Wandstärke, min.	1 mm
Wandstärke, max.	5 mm
Nettogewicht	25 g

