

THIS DOCUMENT IS ISSUED IN STRICT CONFIDENCE
ON CONDITION THAT IT IS NOT COPIED REPRINTED
OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY
OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT
OF SOUTH BAY CABLE CORPORATION.

REVISION			
	DESCRIPTION	DATE	APPROVAL

TWISTED PAIRS-3 UNITS

Awg No. 24(stranded)B/C
Polyethylene Insulation
Two conductors twisted
Belt: Polyethylene

DRAIN WIRE-1 UNIT

Awg No. 24(stranded)

TAPE

Aluminum/Mylar tape

SHIELD

Copper Braid

TAPE

STRENGTH MEMBER

Kevlar™


JACKET

Polyurethane

INTERSTICES VOID FILLED

FILLERS

Plastic rods

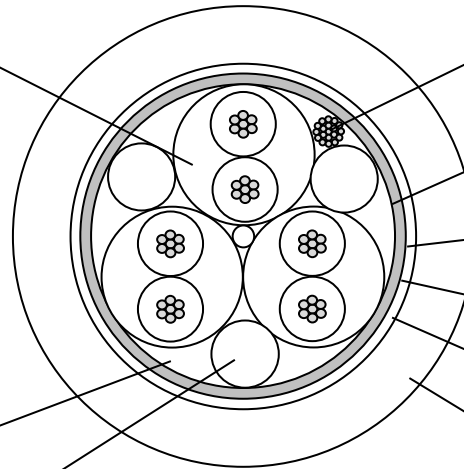

ESTIMATED VALUES

Nominal O.D. ----- 0.540"
Min. Bend Diameter ----- 14 Inches (10" static)

**South Bay
Cable**



Drawn	O.L.	12/15/04	Approval		
Checked			Approval		

E-M Cable

SB-45027